(Es	DUTHO	o s	OUTHCO	NO.	19	SWELL	LATC	DATE DR. 20 JUL 93 E .	MN CHKD	SC I	CALE DRAY	VING NUMBER - 19-5
REV.	DATE	BY-CHKD	REVI	SIONS		ITEM	COMPONENT		MATER	IAL	COLOR	PACKAGING
G	02MAY95	KGS	PRN:19 120			ASSEMBLY	_	9-51-YY 9-54-YY	_		_	BULK PACKED INDIVIDUALLY PACKED
							HANDLE	_	SEE N	DTES	SEE TABLE I	
							BUSHING	_	SEE N	DTES	BLACK	
							ACORN NUT	_	SEE N	DTES	BLACK	
							WASHER	_	SEE N	DTES	BLACK	
							TEE SHAFT	_	SEE N	DTES	BLACK	

TABLE I

-YY	HANDLE COLOR		-YY	HANDLE COLOR		-YY	HANDLE COLOR	
	BLACK							

MATERIAL NOTES:
-HANDLE & WASHER: NYLON
-TEE SCREW: GLASS FILLED NYLON
-ACORN NUT: NYLON
-BUSHING: SBR RUBBER

INSTALLATION NOTES:

I PREPARE HOLE IN DOOR AS SHOWN. OPTIONAL FLATS
IN DOOR PREPARATION WILL PREVENT LATCH ROTATION.

2 PREPARE HOLE IN FRAME AS SHOWN.


3 WITH HANDLE IN OPEN (UNLATCHED) POSITION, SLIDE
WASHER (IF REQUIRED) OVER THE TEE SHAFT,
THEN INSERT TEE SHAFT THROUGH DOOR.


4 SLIDE BUSHING OVER TEE SHAFT AND SECURE WITH ACORN
NUT. FOR "NO ADJUSTMENT" DOOR THICKNESS, RUN NUT UNTIL
FULLY SEATED ON TEE SHAFT (IN MAXX. TORQUE). FOR
OTHER DOORS THICKNESSES, ADJUST NUT FOR SATISFACTORY
LATCHING ACTION.

5 CHECK THE FREE EXPANDED DIAMETER OF BUSHING.
WHEN LATCHED BUT NOT ENGAGED IN FRAME,
BUSHING DIAMETER SHOULD BE 15.5 MINIMUM TO
16.5 MAXIMUM.

SHIPPING NOTES:
-IF BULK PACKED, HANDLE/TEE SUBASSEMBLIES, NUTS,
WASHERS, AND BUSHINGS WILL BE PACKED SEPARATELY. IF
INDIVIDUALLY PACKED, LATCHES WILL BE SHIPPED WITH
ONE NUT, ONE BUSHING, ONE WASHER, AND ONE SUBASSEMBLY
PER BAG.


DOOR THICKNESS	USE WASHER?	ADJUSTMENT REQ'D?
I TO 1.5	YES	YES
1.7 ±0.2	YES	NO
1.9 TO 2.3	YES	YES
2.5 ±0.2	NO	NO
2.7 TO 4.8	NO	YES





EXPLODED VIEW

TABLE II

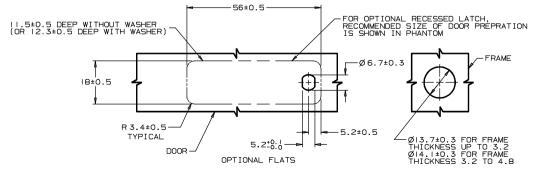

PANEL PREPARATION