


060-0500 Plunger Bolt

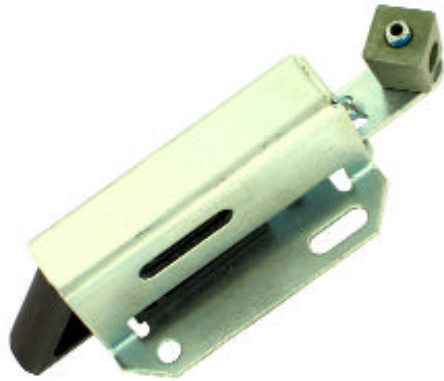

DESIGNED FOR:

- Lift gate doors, baggage compartment doors, and utility compartment doors

FEATURES/BENEFITS:

- Unique, economical, single piece cover design
- .625" allowable travel
- Low operating efforts
- Corrosion resistant
- Slotted mounted holes for ease of installation
- Precision placed mounting holes allow pre-drilling of holes in mating parts
- Optional inside release feature
- Non-metallic plunger bolt
- Optional collar and setscrew for easy rod attachment and adjustment



500 Bailey Avenue
P.O. Box 350
New Hampton, Iowa 50659
United States
Tel: 641-394-3188
Fax: 641-394-2392
1-800-447-0343
www.trimarkcorp.com



TriMark Europe, Ltd.

Cedar Court
Walker Road
Bardon Hill
Coalville LE67 1TU
United Kingdom
Tel: +44 (0)1530 512460
Fax: +44 (0)1530 512461
www.trimarkeu.com



060-0500 Plunger Bolt

FINISH:

- Cover and link - zinc plated with clear chromate conversion coating
- Collar - clear chromate dip

MATERIAL:

- Cover and link: cold rolled steel
- Plunger bolt: black nylon
- Collar: zinc die cast alloy

USE WITH:

- Please refer to our website for related products that are compatible for use with this product

INSTALLATION:

- Recommended use of #10-24 or #10-32 type D, F, G, or T thread cutting, self-threading screws (not included)





AVAILABLE:

- With or without collar and setscrew as shown below (please inquire)
- Operated with cables or rods
- Custom rods up to .219 Ø
- Optional nose configurations available (requires tooling)

Individual part dimensions are for reference only. Refer to individual part drawings for complete dimensions, specifications, and installation procedures. Engineering assistance and application drawings are available.

U.S. Patent No. 5,360,355

For more information visit
www.trimarkcorp.com

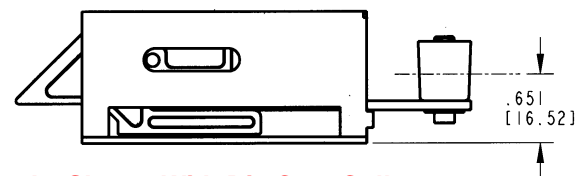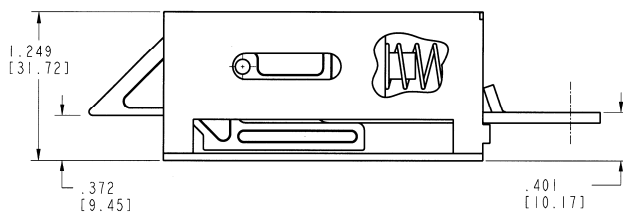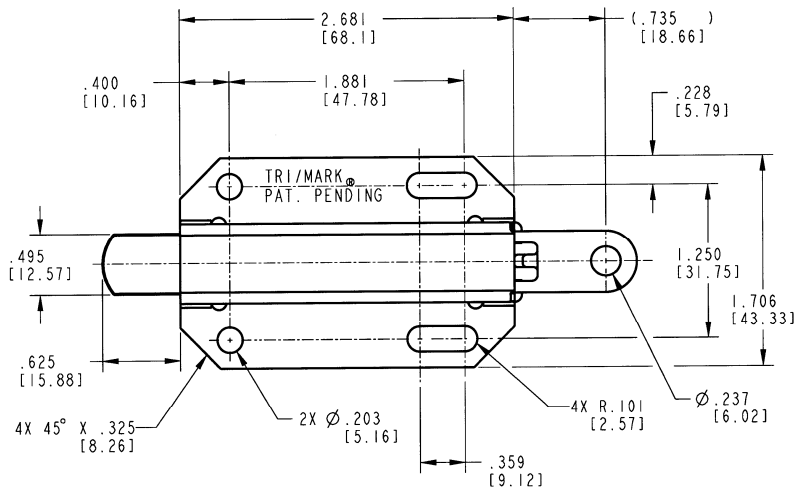

As Shown With Die Cast Collar